


## Freezer room MSRF 1318

### 230V 1N~

Cold area -18...-22°C. Supplied in elements

- 80mm polyurethane insulation
- automatic temperature control and electronic thermostat with number display
- automatic defrost and evaporation of condensation water
- supplied with 4 shelf tiers, made of plastic accepted in food industry , adjustable every 50 mm.
- interior and exterior finish of steel plate with white polyester coating
- lockable door and interior light
- Optional extras: room without floor elements, extra shelves available in s/s, floor heat resistance

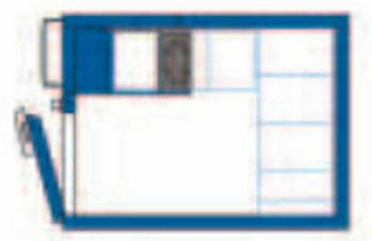

## Freezer room MSRF 1318 230V 1N~

|                               |               |
|-------------------------------|---------------|
| Product capacity              | 3520 l        |
| Item width mm                 | 1350          |
| Item depth mm                 | 1800          |
| Item height mm                | 2100          |
| Package volume                | 2.627         |
| Unit of volume                | m3            |
| Package volume                | 2.627 m3      |
| Package length                | 74            |
| Package width                 | 155           |
| Package height                | 229           |
| Package unit of dimension     | cm            |
| Package dimensions (LxWxH)    | 74x155x229 cm |
| Net weight                    | 240           |
| Net weight                    | 240 kg        |
| Gross weight                  | 250           |
| Package weight                | 250 kg        |
| Unit of weight                | kg            |
| Connection power kW           | 1.33          |
| Fuse Size A                   | 16            |
| Connection voltage V          | 230           |
| Number of phases              | 1N            |
| Frequency Hz                  | 50            |
| Type of electrical connection | Plug          |
| Electrical conn. height mm    | 2100          |
| Type of the refrigerant       | R290          |
| Quantity of refrigerant g     | 149           |