

Induction cooker Ardox IE6H

Induction range, 6 zones, each 5 kW, total 30 kW Diameter of the zones 260 x 260 mm Made completely out of stainless steel. Height-adjustable stand 700-900 mm, with a stainless steel shelf.

Fast, efficient and safe.

- Induction range produces virtually no excess heat to the kitchen
- Considerably faster than an electric or gas range
- Immediate reaction to power adjustment
- The range itself does not warm up and is always cooler than the cooking vessel
- Spill-overs do not burn in the cool surfaces
- Heat is produced only when a cooking vessel with min diam. 120mm is on the zone
- Energy consumption significantly lower than that of an electric range

Because of the operating principle, the kettles used must have a magnetic bottom. Best results can be achieved with steel kettles with either sandwich or compoind bottom. Most cast iron cooking kettles work. Aluminium kettles are not recommended and they usually do not work.





Induction cooker Ardox IE6H

Item width mm	1200
Item depth mm	800
Item height mm	900
Package volume	1.217
Unit of volume	m3
Package volume	1.217 m3
Package length	126
Package width	92
Package height	105
Package unit of dimension	cm
Package dimensions (LxWxH)	126x92x105 cm
Net weight	85
Net weight	85 kg
Gross weight	85
Package weight	85 kg
Unit of weight	kg
Connection power kW	30
Fuse Size A	63
Connection voltage V	400/230
Number of phases	3NPE
Frequency Hz	50
Startup current A	46.1
Power type	electric
Туре	induction
Operation type	electromechanical
Top material type	ceramic
Cooking zone	6
Cooking zone size mm	260
Cooking zone power kW	5


Induction cooker Ardox IE6H

Power range kW	30
Frying top type	smooth





METOS ARDOX

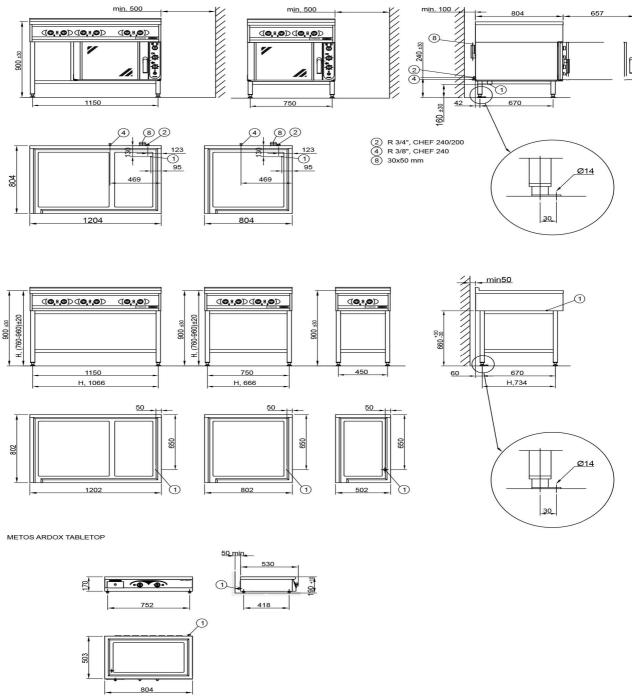

This document may not be copied in part or in whole by any process nor passed on to a third party without the written permission of the owner Metos Oy Ab.