


## Cold room MSRC 2736 230V 1N~

Cold area +2...+6°C. Supplied in elements

- 80mm polyurethane insulation
- automatic temperature control and electronic thermostat with number display
- automatic defrost and evaporation of condensation water
- supplied with 4 shelf tiers, made of white-painted steel plate, adjustable every 17mm.
- interior and exterior finish of steel plate with white polyester coating
- lockable door and interior light
- Optional extras: room without floor elements, extra shelves available in s/s

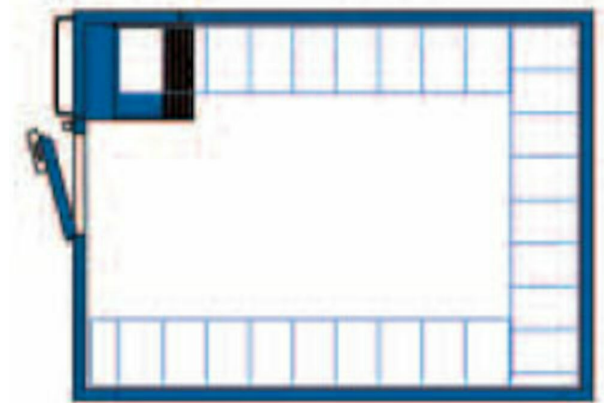

## Cold room MSRC 2736 230V 1N~

Product capacity	16520 l
Item width mm	2700
Item depth mm	3600
Item height mm	2100
Package volume	6.582
Unit of volume	m3
Package volume	6.582 m3
Package length	149
Package width	155
Package height	285
Package unit of dimension	cm
Package dimensions (LxWxH)	149x155x285 cm
Net weight	830
Net weight	830 kg
Gross weight	840
Package weight	840 kg
Unit of weight	kg
Connection power kW	0.92
Fuse Size A	10
Connection voltage V	230
Number of phases	1N
Frequency Hz	50
Type of electrical connection	Plug
Electrical conn. height mm	2100
Type of the refrigerant	R404A
Quantity of refrigerant g	750